



**Extractor Service Tool
For Ruger® 10/22®
Installation Instructions
V1.0**

www.tandemkross.com

For more information or support, contact CustomerService@tandemkross.com

ATTENTION: Before you begin, be certain that the magazine is removed, and the chamber is clear. Follow all safety precautions, and double check your firearm is SAFE.

For the video guide, please click [HERE](#).


Installation Guide:




Installation Steps:



- 1) Take the curved hook end of the tool and use it to hook the leading edge of the plunger.

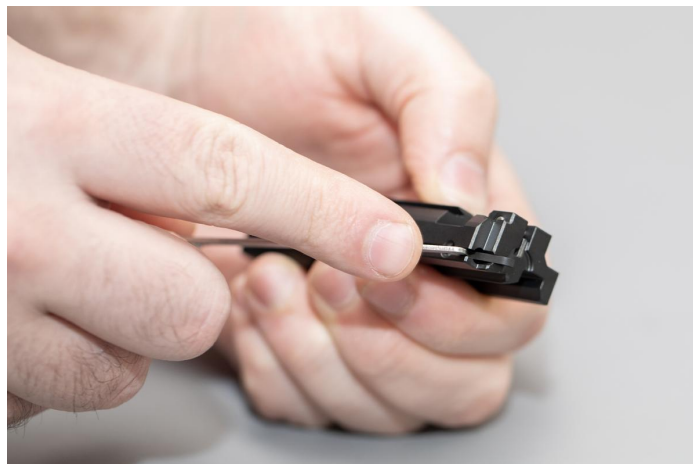


- 2) With the tool in position on the plunger, pull it back while pushing in and it will snap into place.

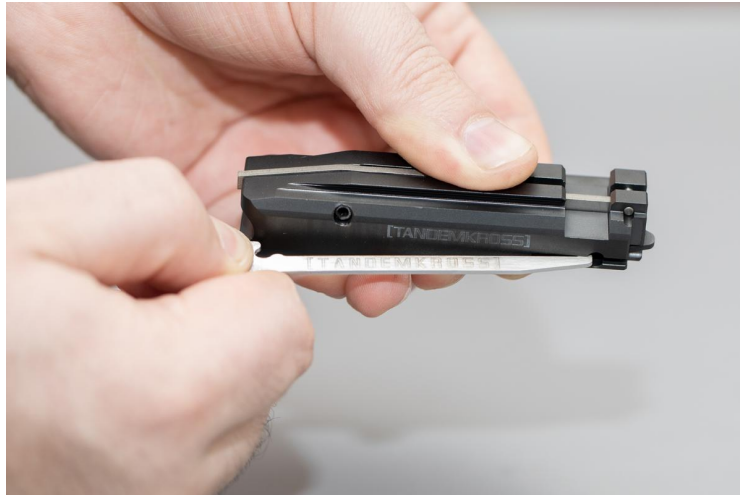

- 3) With the tool pulled back, swing it in toward the bolt. You can rest the circular end on the other end of the bolt like shown in the image below.



- 4) With the tool held in place, take the extractor and remove it by gently wiggling it side to side.

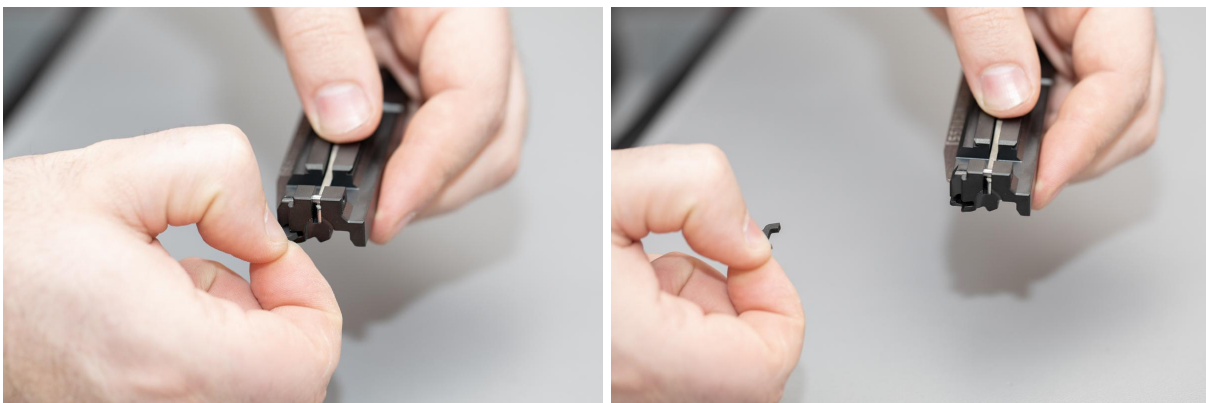

- 5) Unhook the tool from the rear and slide it forward to remove the extractor spring, and plunger.



- 6) To reassemble, insert the extractor spring into the bolt, followed by the short end of the plunger.



- 7) Using the hooked end of the tool, grasp the face of the plunger and pull it back.



- 8) Insert the extractor and swing it away from the bolt while holding your finger on the extractor.



- 9) Release the tool and test the function of the extractor.



Thank you!

You have successfully completed the installation of your TANDEMKROSS Extractor Service Tool for Ruger® 10/22®. Thank you for your support, and if you have any further questions, please reach out to CustomerService@tandemkross.com. Enjoy!