



“EagleEye” Peep Sight for Williams Fire Sight Installation Instructions

V1.0

www.tandemkross.com


For more info or support contact CustomerService@tandemkross.com

Attention:

Before you begin, be certain that the magazine is removed and the chamber is clear.

You will need a small flathead screwdriver for the installation of this part.

1. Begin by removing the windage adjustment screw using a small flathead screwdriver. Be careful not to lose the small ball detent used for the click adjustment of the sight.

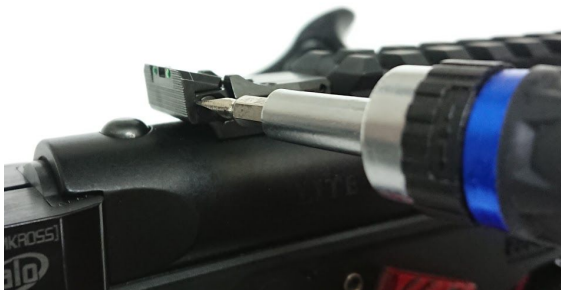

2. Then, remove the fiber-optic sight from the sight housing. Once removed, you will notice a spring inside. Transfer this spring to the new EagleEye sight, and put the sight into the rear sight housing. Put the spring side in first, compressing it at the same time.



3. Once the sight is in place, reinstall the windage adjustment screw. Tighten the screw until you can feel the ball detent clicking.



4. Bring your sight back to center using the elevation adjustment screw , go out to the range and zero it in and you are finished! Enjoy your new Tandemkross EagleEye Peep Sight!

