



Sentinel Guide Rod For Ruger® Mark™ Series Installation Instructions

V1.0

www.tandemkross.com

For more information or support, contact CustomerService@tandemkross.com

ATTENTION: Before you begin, be certain that the magazine is removed, and the chamber is clear. Follow all safety precautions, and double check your firearm is SAFE.

Installation Guide:

Included with Sentinel Guide Rod:


- 1x Sentinel Guide Rod

Installation Steps:


- 1) Disassemble your firearm according to its Owner's Manual as this will differ depending on the generation of Mark™ Series.



- 2) With the bolt removed from the upper, use your hand to push up on the factory guide rod and remove it from the assembly.

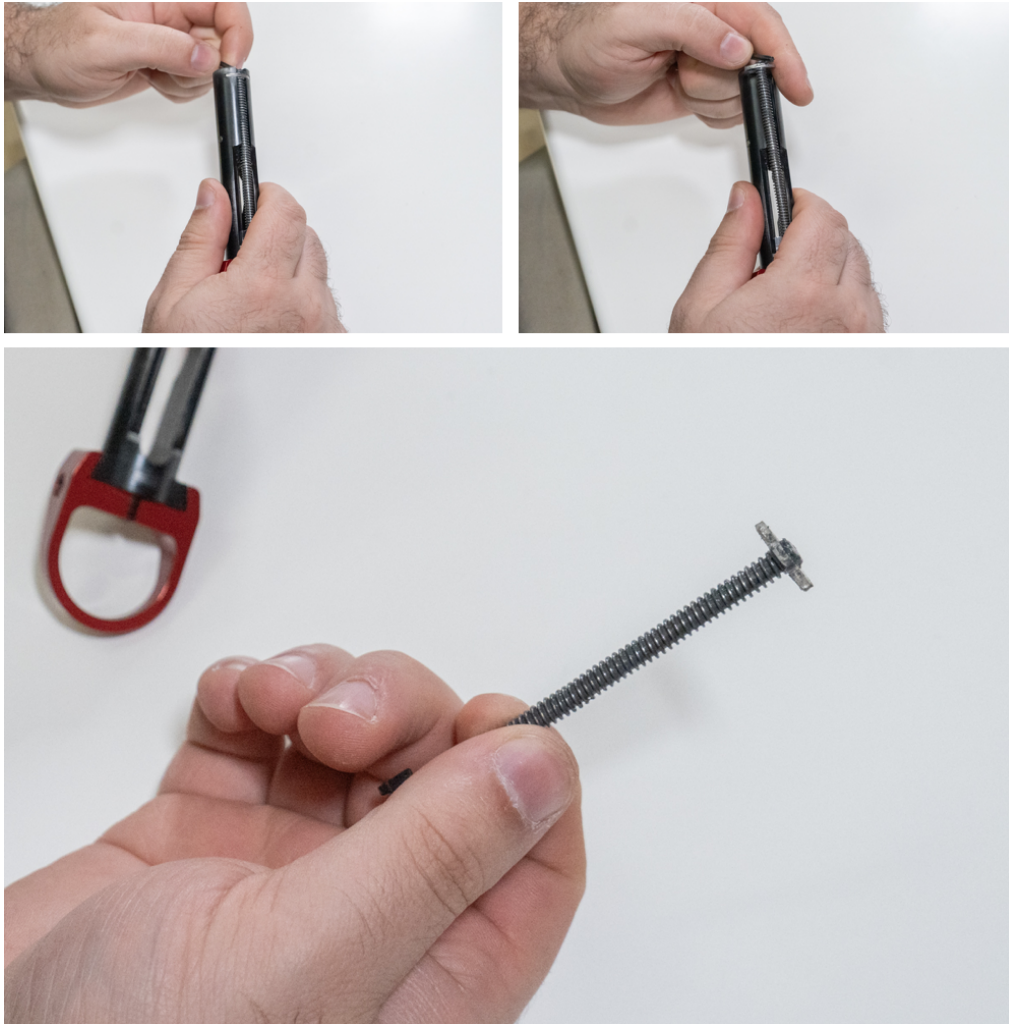

- 3) Orient the Sentinel Guide Rod so that the flat-bottom/stepped side of the end cap is down toward the firing pin and the rounded side is facing up.

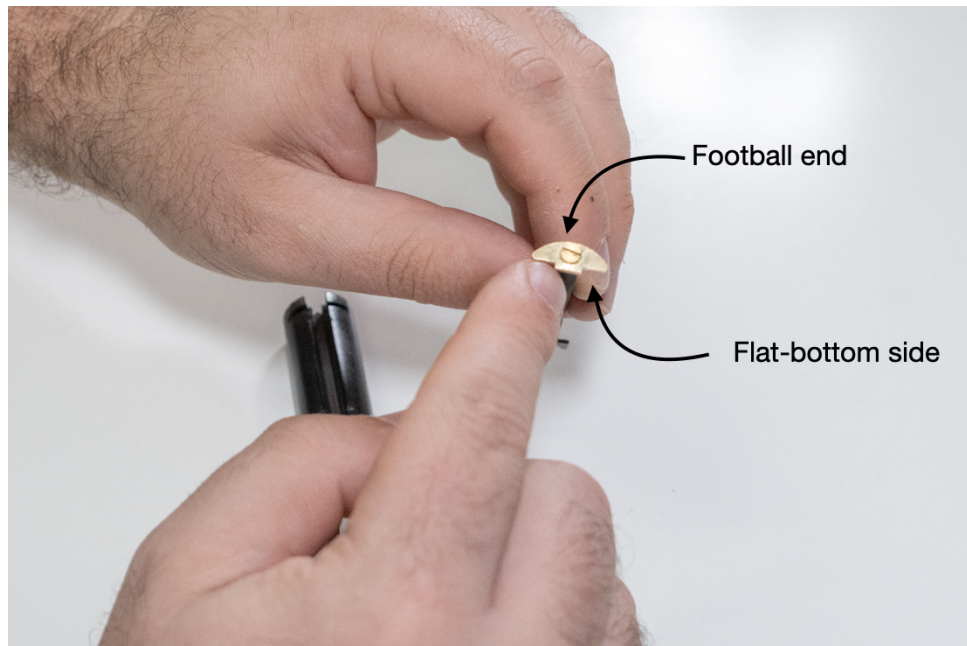

- 4) Locate the rear pronged end of the Sentinel Guide Rod. Place this end into the bolt first.



- 5) With the pronged end locked in, pull back on the front end cap and press it down so that it is flush with the bolt.



With step #5 complete, you can reassemble your firearm and perform a function test.

Thank you!

You have successfully completed the installation of your Sentinel Guide Rod for Ruger® Mark™ Series. Thank you for your support, and if you have any further questions, please reach out to CustomerService@tandemkross.com. Enjoy!